



## OEM ODM Residential Solar Power Battery Storage System Deep Cycle

Our Product Introduction

for more products please visit us on [esslithiumbattery.com](http://esslithiumbattery.com)

### Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-2560W
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



### Product Specification

- Standard Charge Current: 0.5C
- Maximum Charging Current: 50A
- Dimension: Width: 135±1mm
- Battery Voltage: 40V
- Nominal Voltage: 3.2V
- Weight: ≤2.03 Kg
- Operating Voltage Range: 2.5-3.65V
- Internal Impedance: ≤0.8mΩ
- Highlight: OEM Residential Solar Power Battery Storage, ODM Residential Solar Power Battery Storage, Deep Cycle residential solar battery system



### More Images




## Product Description

### Voltage Range 136.8V- 172.8V ESS Lithium Battery Customized Oem Odm Deep Cycle Home Household Battery

#### Description

An ESS (Energy Storage System) lithium battery is a type of rechargeable battery that uses lithium-ion technology to store electrical energy. These batteries are designed specifically for energy storage applications, including residential, commercial and industrial systems.

### Connection diagram

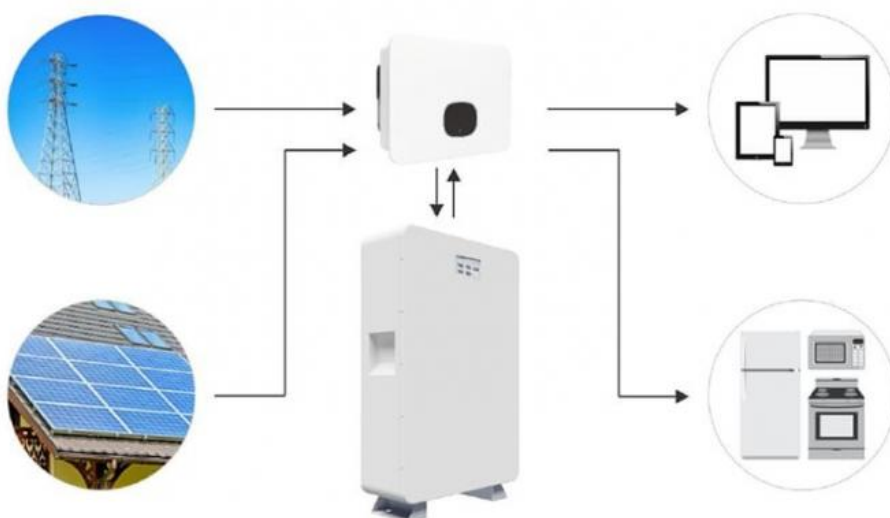

#### Home Energy Storage System Specification

No.	Item	General Parameter	Remark
1	Material system	Lithium iron phosphate	/
2	Typical Capacity	50Ah	0.5C Standard discharge
3	Operating voltage range	2.5~3.65V	/
4	Nominal Voltage	3.2V	Mean Operation Voltage
5	Standard Charge Voltage	3.6V	By standard charge method
6	Internal Impedance	≤0.8mΩ	1kHz 2%SOC
7	Dimension	Thickness: ≤37.5mm Width: 135±1mm Height: 192±1mm	Initial Dimension
8	Weight	≤2.03 Kg	
9	Standard charge current	0.5C	0.5C constant current, 3.65V constant voltage charge to 3.65V, continue charging till current decline to ≤0.05C
10	Maximum Charging Current	50 A	25±2


11	Standard discharge Current	0.5C	25±2
12	Maximum discharge current	50 A	25±2
13	Maximum Discharging Current	100A(2C)	25 , 50%SOC, 30s

## Home Energy Storage System Operation Pannel




- ① — Output negative pole
- ② — Output positive pole
- ③ — RS232 communication port (software update)
- ④ — RS485/CAN communication port(communicate with inverter)
- ⑤ — Switchs for address

## Home Energy Storage System Size

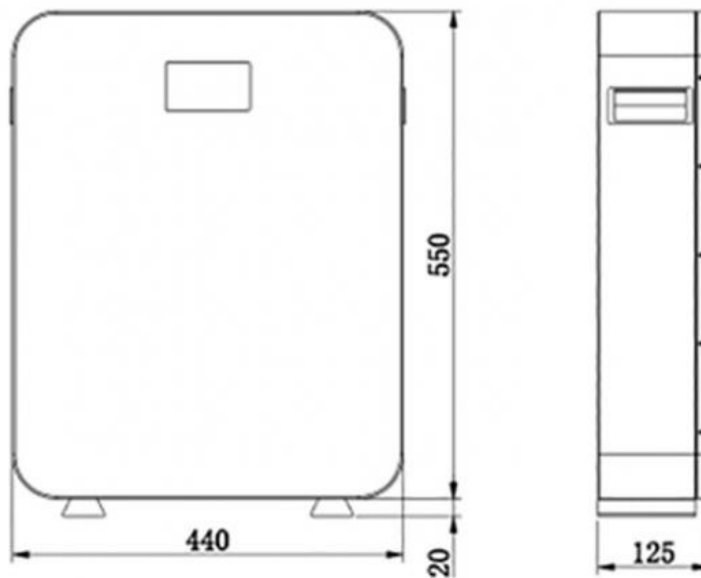


Home Energy Storage System Single Battery Pack Wiring Diagram

Single battery pack wiring diagram

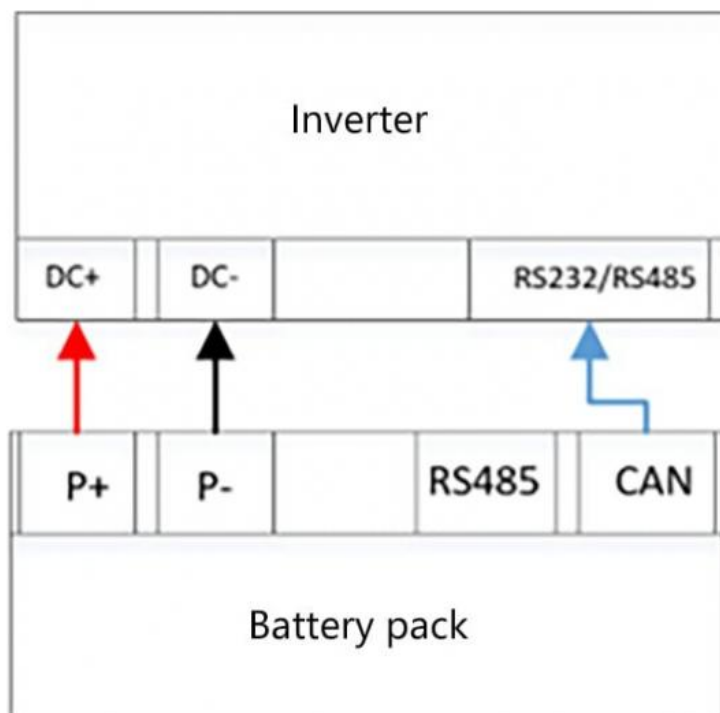

Home Energy Storage System Parallels Connection Wiring Diagram

## Parallel connection wiring diagram of multiple battery packs

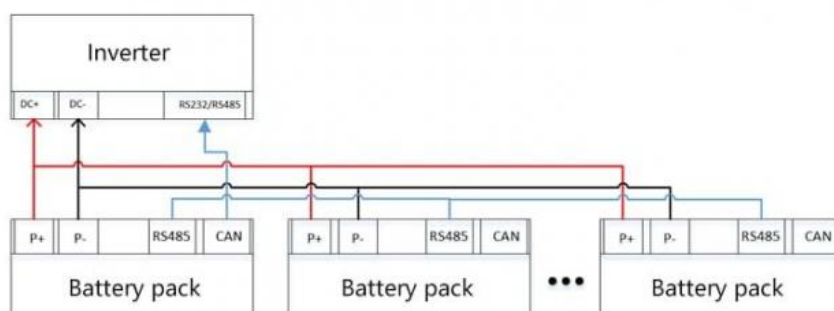

### FAQ

**Q: What is your MOQ?**

**A:** There is no MOQ and we also support a sample service.

**Q: How about the payment terms?**

**A:** T/T, Paypal, Wire Transfer and Online Transfer are all acceptable.

**Q: Is the battery kit equipped with BMS?**

**A:** Yes, our battery kit comes complete with the BMS and all the accessories needed to assemble the battery pack. Customers can assemble their own battery packs if they have enough batteries.

**Q: What options are available for the BMS that comes with the battery kit?**

**A:** 100A/150A/200A BMS are available for customers to choose.

**Q: What are the advantages of your battery kits?**

**A:** Our kits have the following advantages:

Stackable

External port can pass 250A current individually

The internal BMS is compatible with CAN and RS485 communication and can communicate with a wide range of inverters without complex commissioning

The PCB boards are soldered with the corresponding wires for the customer to assemble in order

The external LCD display shows the basic parameters

The side clamping plates apply pressure to the battery for better clamping

Equipped with a weak switch for greater safety

Complimentary 485 adapter cable for connection to the PC

**Q: What is the shipping time limit for battery kit?**

**A:** The transit time is approximately 35-38 business days.

**Q: What should I do when I receive the battery kits?**

**A:** First open the box when you sign for it to check that the contents have not been damaged in transit, and then double check that the battery kit is complete with all the accessories.

**Q: Why has my logistics information not been updated?**

**A:** The goods will be shipped by UPS or a local shipping company, but due to the tedious process of shipping across borders, the logistics information will not be updated for a while until the goods arrive in your country. It is only when the goods are picked up by the local carrier and ready for dispatch that the logistics status will be updated accordingly.



#### **feature**

- 1.High efficiency: ESS lithium batteries are highly efficient, with little energy lost during charging and discharging.
- 2.Lightweight and compact: ESS lithium batteries are relatively lightweight and compact, making them suitable for use in a variety of applications, from residential homes to large-scale commercial and industrial installations.
- 3.Safe and reliable: ESS lithium batteries are designed with safety in mind, with built-in protection circuits to prevent overcharging, over-discharging, and short circuits.



+86 18620492985



[sales@esslithiumbattery.com](mailto:sales@esslithiumbattery.com)



[esslithiumbattery.com](http://esslithiumbattery.com)

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou,  
China