LiFePO Rackmount Lithium Battery 48V 51.2V 50ah 100ah 2.56kwh 5.12kwh

safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE

Basic Information

- Place of Origin:
- XWELL • Brand Name: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1
- Certification:
- Model Number:
- Minimum Order Quantity: 1 pcs
- · Packaging Details: Carton
- Delivery Time:
- Payment Terms: L/C, D/A, D/P, T/T, Western Union,
- MoneyGram Supply Ability: 5000 pcs per month

XW-5120W-1

7-10 working days

China



Product Specification

Highlight:	Rackmount Lithium Battery 48V, Rackmount Lithium Battery 50ah, LiFePO 48v rack mount lithium battery
Cycle Life:	>6000 Cycles(80%DOD)
Communication Interface:	RS485, RS232, CAN
 Display: 	LCD Optional
• Discharge Cut-off Voltage:	42.5V
Max Charge Current:	50A
• Discharge Current:	50A
Cell Type:	LiFePO4 Battery
Energy:	2.56Kwh 5.12Kwh 10.24Kwh (Optional)
Capacity:	50Ah 100Ah 200Ah (Optional)
• Voltage:	51.2V (Optional)

48V 51.2V 50ah 100ah 200ah 2.56kwh 5.12kwh 10.24kwh Rack Mounted Lithium Battery LiFePO Battery Solutions

Applications of the battery

Lithium Iron Phosphate can be used in most applications that use Lead Acid GEL or AGM type batteries. Suitable applications include:

- 1. Solar Storage
- 2. Switching applications and more
- Base transceiver station
 Communication equipments
- 5. Central office
- 6. Telecommunication systems
- 7. Electronic cash registers
- 8. Microprocessor based office machine
- 9. UPS [']

Cautions

- 1. Do NOT short circuit, reverse polarity, crush or disassemble.
- 2. Do NOT heat or incinerate.
- 3. Do NOT immerse in any liquid.

4. Store at 30~50% SOC. Recharging every 3 months is recommended. The storage area should be clean, cool, dry and ventilated.


Description of battery

Xwell rack mounted Lithium battery (LiFePO battery) solutions are highly integrated, deep cycle backup power solutions for your solar home energy storage system. With rich experience and advanced techniques, the product has the features of the fashionable design, high energy, high power density, long service life, and easiness of installation and expansion.

Rackmount Lithium Battery Specification

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah		
Nominal voltage	51.2V				
Nominal capacity (kwh)	2.56	5.12	10.24		
Cell type	LiFePO4				
Standard charge voltage	54.6V(adjustable)				
Max charge current	50A				
Discharge cut-off voltage		42.5V(adjustable)			
Max discharge current	50A				
Display		LCD(Optional)			
Communication interface		CAN/RS485/RS23	2		
Cycle life	>6000 Cycles (80%DOD)				
Charge temperature range	0~45°C				
Discharge temperature range	-20~60°C				
Color	Black				
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U		
Weight	About 35Kg	About 42Kg	About 84Kg		
Installation method	Rack Mount				


Cell Specification of Rackmount Lithium Battery




a internet	"	item	Farameter	
A	A	Height	119±1.0 mm	
	В	Width	160±1.0 mm	
	c	Thickness	< 50 mm	
	D	Tabs Distance	97±0.5 mm	
	-	. abs b isturice		

	Ĩ	LiFePO4 Battery			•
)	ي				
		ຍ(ຄ)(ຽ) (ຄ) (ຄ) (ຄ) (ຄ) (ຄ) Eunction	#	Item	(a) (a) Eunction
#	Item) (ຄ) (7) (ສ) (ອ) (ອ) (ຊ) (ຊ) Function mount in 19 inch cabinet or anti-seismic rake	#	Item SOC Indicator	Function
#		Function mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	Function Indicate battery capacity percentage
# (1) (2)	Item Case Hanger	Function	(8) (9)		Function
# (1) (2) (3)	Item Case Hanger Handie	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install	(8)	SOC Indicator Dry Contact	Function indicate battery capacity percentage remote on/off control by signal wires
	Item Case Hanger Handle Reset Switch	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery	(8) (9) (0)	SOC Indicator Dry Contact Comm. Port	Function Indicate battery capacity percentage remote on/off control by signal wires RS485+RS232
# (1) (2) (3) (4)	Item Case Hanger Handle Reset Switch On/Off Indicator Working	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery turn on/off green and indicate battery on/off	(e) (9) (1)	SOC Indicator Dry Contact Comm. Port Comm. Port	Function Indicate battery capacity percentage remote on/off control by signal wires RS485+RS232 RS232

Size of Rackmount Lithium Battery

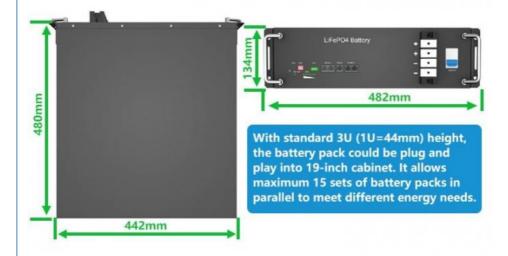


Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

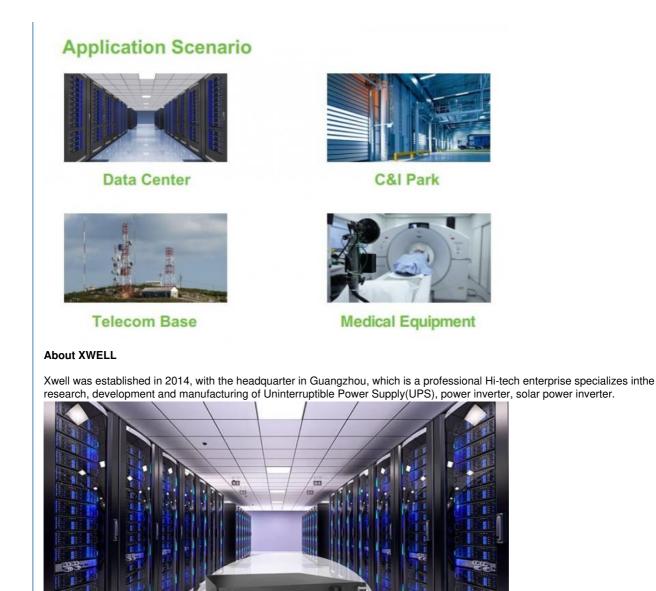

XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China