




## LCD Display Optional Rack Mount Lifepo4 Battery 51.2V 100ah 200ah

Our Product Introduction

for more products please visit us on [esslithiumbattery.com](http://esslithiumbattery.com)

### Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month

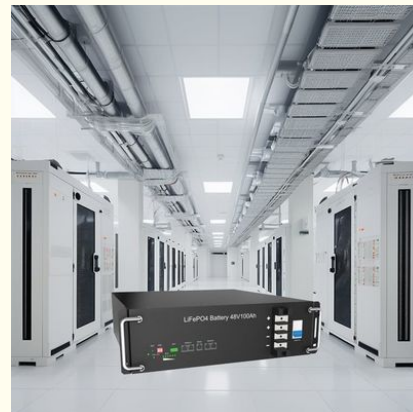

### Product Specification

- Pack Voltage: 48V To 51.2V
- Pack Type: LiFePO4 Prismatic Battery
- Pack Capacity: 50Ah 100Ah 200Ah
- Pack Energy: 2.56Kwh 5.12Kwh 10.24Kwh (Optional)
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **Rack Mount Lifepo4 Battery 51.2V,  
Rack Mount Lifepo4 Battery 100ah**

## Product Description

### Rackmount LiFePO4 Battery Power System 51.2V 100ah 200ah Lithium Ion Battery Pack

It's long life character, highest energy and power density in the industry, fashionable design, easiness of installation and expansion, all reflects the real requirements of end users and strongest technical capability of Xwell's. Widely used in microgrid energy storage, photovoltaic energy storage, computer data ROM stand-by power, UPS and etc.


#### Features

1. A Grade lithium iron phosphate battery cell inside, superior safety, 2000+ heavy duty deep cycles lifetime.
2. Built-in smart BMS automatic protection for over-charge, over discharge, over current and over temperature.
3. Internal cell balancing.
4. Lighter weight and compact size: About 30% ~40% of the weight of a comparable lead acid battery.
5. IP65 waterproof.
6. Easy installation
7. Wider temperature range: -20 ~60 .

#### Rackmount Lithium Battery Specification


| Model                       | 51.2V50Ah             | 51.2V100Ah        | 51.2V200Ah        |
|-----------------------------|-----------------------|-------------------|-------------------|
| Nominal voltage             | 51.2V                 |                   |                   |
| Nominal capacity (kwh)      | 2.56                  | 5.12              | 10.24             |
| Cell type                   | LiFePO4               |                   |                   |
| Standard charge voltage     | 54.6V(adjustable)     |                   |                   |
| Max charge current          | 50A                   |                   |                   |
| Discharge cut-off voltage   | 42.5V(adjustable)     |                   |                   |
| Max discharge current       | 50A                   |                   |                   |
| Display                     | LCD(Optional)         |                   |                   |
| Communication interface     | CAN/RS485/RS232       |                   |                   |
| Cycle life                  | >6000 Cycles (80%DOD) |                   |                   |
| Charge temperature range    | 0~45°C                |                   |                   |
| Discharge temperature range | -20~60°C              |                   |                   |
| Color                       | Black                 |                   |                   |
| Dimension (mm)              | 442x410x133<br>3U     | 442x410x177<br>4U | 550x442x220<br>5U |
| Weight                      | About 35Kg            | About 42Kg        | About 84Kg        |
| Installation method         | Rack Mount            |                   |                   |

#### Cell Specification of Rackmount Lithium Battery




| # | Item          | Parameter  |
|---|---------------|------------|
| A | Height        | 119±1.0 mm |
| B | Width         | 160±1.0 mm |
| C | Thickness     | ≤50 mm     |
| D | Tabs Distance | 97±0.5 mm  |


#### Operation Pannel of Rackmount Lithium Battery

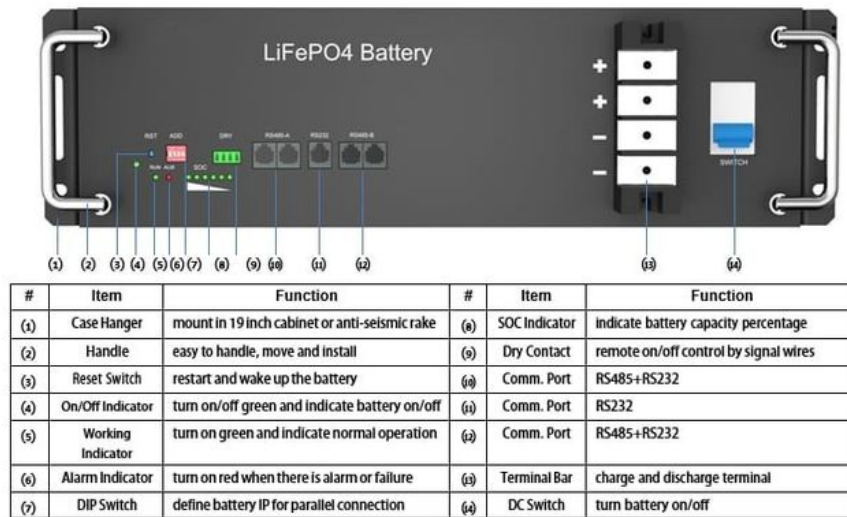

### Size of Rackmount Lithium Battery

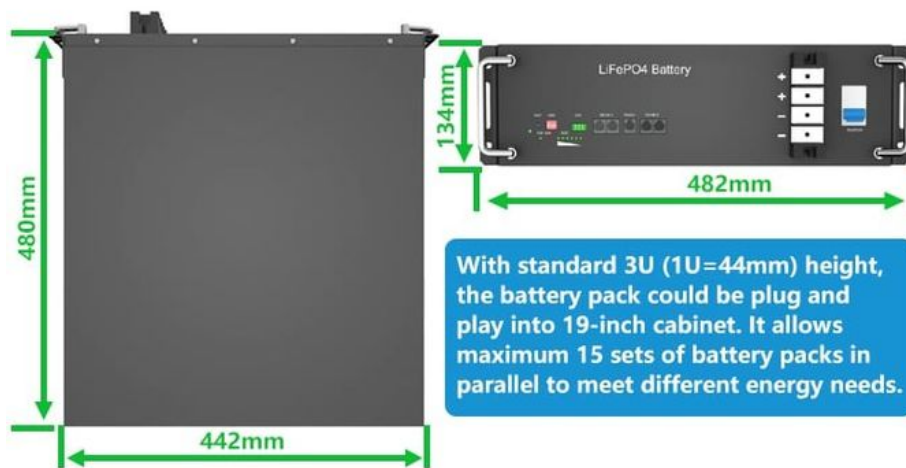

### Structure of Rackmount Lithium Battery

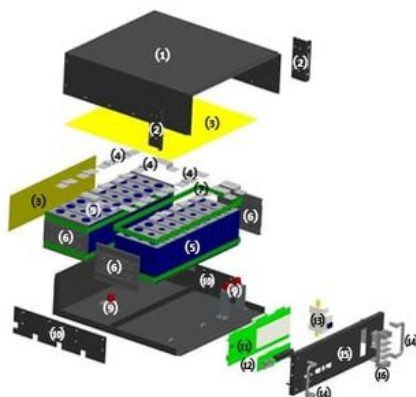

| #    | Item                         | Material            |
|------|------------------------------|---------------------|
| (1)  | Case Cover                   | SPCC                |
| (2)  | Case Hanger                  | SPCC                |
| (3)  | Insulation Sheet             | Ethoxyline          |
| (4)  | Bus-Bar                      | Aluminum Alloy      |
| (5)  | Battery Cell                 | LFP, Aluminum Shell |
| (6)  | Module Side Plate            | ABS / PC            |
| (7)  | Cell Binding Loop            | Plastic Steel       |
| (8)  | Case Bottom                  | SPCC                |
| (9)  | Insulating Wiring Terminal   | Bakelite            |
| (10) | Side Plate Combination Board | SPCC                |
| (11) | BMS                          | PCB                 |
| (12) | Commination Board            | PCB                 |
| (13) | DC Switch                    | /                   |
| (14) | Handle                       | Sherardized SPCC    |
| (15) | Case Front Cover             | SPCC                |
| (16) | Terminal Bar (+ & -)         | /                   |

### Application of Rackmount Lithium Battery

## Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

### What We Offer?

Supply chain solution, strict quality control, real-time response  
OEM/ODM Manufacturer, custom sizes and shapes available on request  
Suggestion of new design or material, new technology and cost structure  
Engineers team at your service  
Flexible small orders are acceptable  
One-stop supply to eliminating messy links



**XWELL** GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China