



High Voltage Lifepo4 Rackmount Lithium Battery 30kwh-50kwh Energy Storage System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-1024W-1
- Minimum Order Quantity: 1 pcs
- Price: USD
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Nominal Voltage: 51.2V
- Operating Voltage Range: 456V-584V
- Module: 6pcs-10pcs
- Cell Type: LiFePO4 Prismatic Cell
- Max Charge/discharge Current: 600A-1000A
- Communication Interface: RS485, RS232, CAN
- Nominal Capacity (kwh): 30-50kwh
- Chemistry: Lifepo4
- Highlight: **Industrial Lifepo4 Rackmount Lithium Battery, 30kwh-50kwh Rackmount Lithium Battery, High Voltage Rackmount Lithium Battery**

for more products please visit us on esslithiumbattery.com

Product Description

High Voltag Lifepo4 Rackmount Lithium Battery 30kwh-50kwh Energy Storage System For Industrial Applications

Capacity Range: These systems are typically available with capacities ranging from 30 kWh to 50 kWh, allowing scalability to meet varied energy storage requirements.

Voltage: They operate at higher voltages, such as 480V AC, which is common for industrial and grid-tied applications. used in these systems are lithium iron phosphate (LiFePO₄), known for their safety, long cycle life, and reliability.

Rack Mount Design: The modular rackmount form factor allows these high-voltage systems to be easily integrated into industrial facilities, electrical rooms, and other commercial spaces.


Use Cases:

Renewable energy integration and time-shifting
Peak shaving and load shifting to reduce energy costs
Frequency regulation and other grid ancillary services
Backup power and uninterruptible power supply (UPS) for critical loads

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO ₄		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

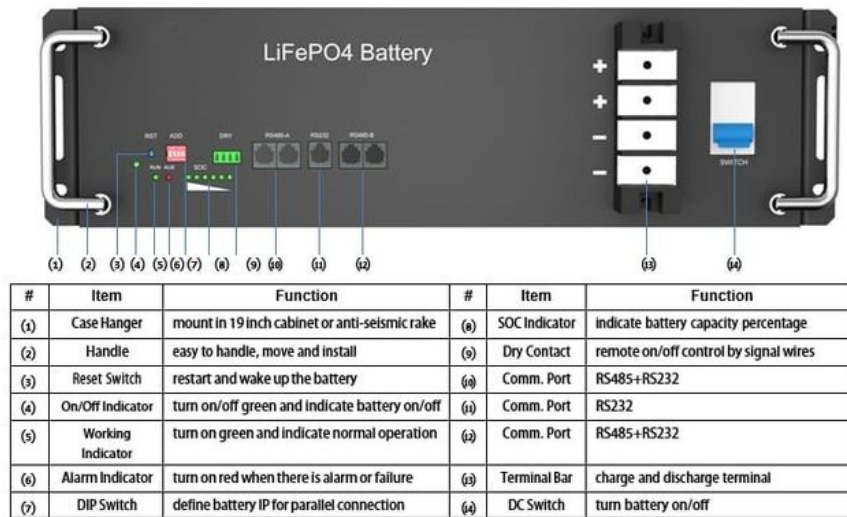

Size of Rackmount Lithium Battery

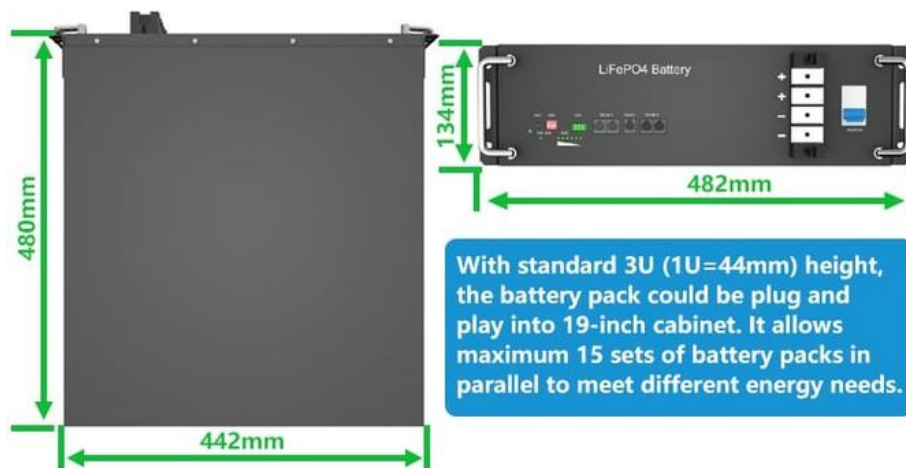

Structure of Rackmount Lithium Battery

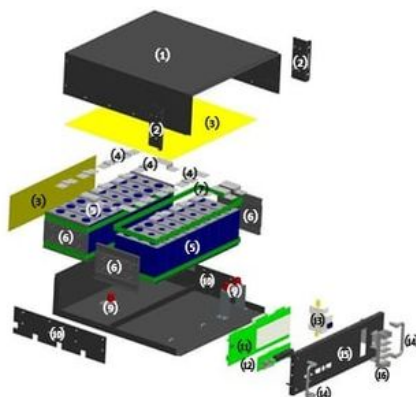

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

Technical specifications and performance capabilities
Safety record and certifications
Warranty terms and after-sales support
Integration with existing infrastructure
Cost-effectiveness and total cost of ownership
Company reputation, experience, and financial stability
Scalability and flexibility to adapt to changing needs



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China